




XIBU SENSOR TAPS

EFFICIENT AND ECONOMICAL

- Automatic hygienic rinse
- Prevents the transmission of germs
- Protects from vandalism
- Water & energy efficient

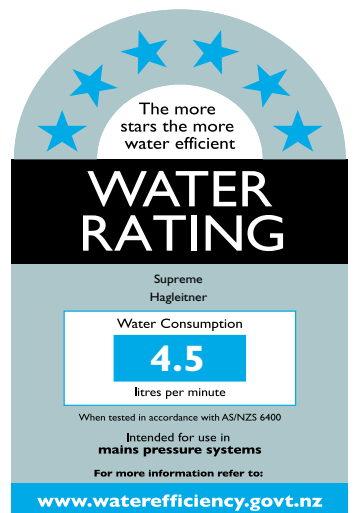

XIBU SENSOR TAPS


The Xibu sensor tap range are efficient, economical, hygienic, safe, comfortable and convenient. The sensor taps allow water to be available whenever it is needed and inhibits any unnecessary water consumption with need orientated technology. The transmission of germs is also prevented while the robust all-metal design aids in protection from vandalism. The standardised parts makes for quick and cost effective servicing and repairs.



WATER IS PRECIOUS

Our "blue planet" is covered to 71% with water. Though, only 3.5% is fresh water and only a fraction, around 0.3%, is available as drinking water. We better be very careful with our resources!

WATER SAVINGS

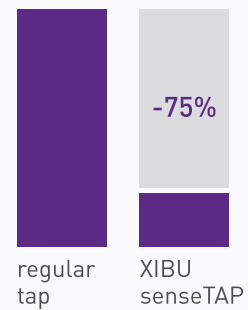

Xibu PROFI Matte



Xibu PROFI Chrome



SPECIFICATIONS

Finish	Chrome, Matte
Power	DC 6V Battery or 240V AC
Water Pressure	0.03-0.8MPA (0.3- 8 bar)
Flow Rate	4 L / min
Connection	3/8" Stainless Steel hose
Safety Shut Off	1 minute
Sensing	PIR – Automatic range adjustment

DIMENSIONS

Height 190mm, depth 165mm, hole Ø 33mm
Nosing 130mm, discharge height 128mm

PROFI inox



SPECIFICATIONS

Finish	Stainless Steel
Power	DC 6V Battery or 240V AC
Water Pressure	0.03-0.8MPA (0.3- 8 bar)
Flow Rate	4 L / min
Connection	3/8" Stainless Steel hose
Safety Shut Off	1 minute
Sensing	PIR – Automatic range adjustment

DIMENSIONS

Height 165mm, depth 162mm, hole Ø 34mm
Nosing 120mm, discharge height 130mm

Xibu SMART Chrome



SPECIFICATIONS

Finish	Chrome
Power	DC 6V Battery or 240V AC
Water Pressure	0.03-0.8MPA (0.3- 8 bar)
Flow Rate	4 L / min
Connection	3/8" Stainless Steel hose
Safety Shut Off	1 minute
Sensing	PIR – Automatic range adjustment

DIMENSIONS

Height 150mm, depth 145mm, hole Ø 34-38mm
Nosing 110mm, discharge height 110mm

Xibu BISTRO Chrome



SPECIFICATIONS

Finish	Chrome
Power	DC 6V Battery or 240V AC
Water Pressure	0.03-0.8MPA (0.3- 8 bar)
Flow Rate	4 L / min
Connection	3/8" Stainless Steel hose
Safety Shut Off	1 minute
Sensing	PIR – Automatic range adjustment

DIMENSIONS

Height 250mm, depth 286mm, hole Ø 34mm
Nosing 245mm, discharge height 175mm

Xibu LAB Chrome



SPECIFICATIONS

Finish	Chrome
Power	DC 6V Battery or 240V AC
Water Pressure	0.03-0.8MPA (0.3- 8 bar)
Flow Rate	4 L / min
Connection	3/8" Stainless Steel hose
Safety Shut Off	1 minute
Sensing	PIR – Automatic range adjustment

DIMENSIONS

Height 265mm, depth 233mm, hole Ø 34mm
Nosing 175mm, discharge height 160mm