

SUPREME III



Hand Dryer
Selection Chart.

SPL

SUPREME III



ffuuss



Supreme Jet Dry Exec II



Supreme Airjet



Supreme dri bubble

Specific Benefits	<p>High Speed Airflow of 73 L/s enveloping hands creates drying efficiency</p> <p>Quiet Very quiet at 70dBA at distance of 1.5m</p> <p>HEPA Filter Hygienic HEPA filter with antibacterial additives to remove 99.97% of bacteria</p>	<p>Hygienic HEPA filtration removes more than 99.97% of particles, water collection tray eliminates drips on the floor</p> <p>Approved for Food Industry Certified as a food-safe hand dryer with HACCP accreditation</p> <p>Energy Efficient Fast 12sec dry combined with low power consumption</p>	<p>High Speed Delivery of warm air at 100m/sec to dry hands in as little as 12 seconds</p> <p>HEPA Filtration Removes more than 99.97% of particles</p> <p>Refined Acoustics 950W long life motor with three selectable settings</p>	<p>HEPA Filter Removes more than 99.97% of particles</p> <p>Energy Efficient 320W-720W of fast drying performance dries hands in 12secs</p> <p>Quiet 'Quiet Mark' accredited - 67dBA with two selectable settings</p>
Cover	ABS - Treated with Biomaster Silver Ions antibacterial additive White / Matte Black / Grey / Gold	ABS / Polycarbonate, Antimicrobial Infused Pearl / Platinum	Die Cast Aluminium White / Brushed Stainless Steel	ABS ION pure infused coating metallic finish White / Grey / Black
Sound Level	70dBA @ 1.5m	75dBA @ 1m	High 69dBA, Medium 67dBA, Low 66dBA (measured @ 2m)	Maximum Mode 72 dBA @ 1m Quiet Mode 67dBA @ 1m
Dry Time	13-15 seconds	10-12 seconds	12 seconds	12 seconds
Filtration	HEPA H13 - treatment with antibacterial additives	HEPA with odour neutralising tablet	HEPA (Coarse filter on request)	HEPA (H13) & UV-C sterilisation
Element	Nil, fitted with preheat	Nil	Nichrome wire construction 475W	400W - switchable
Power	1100W	1000W	950W High, 650W Med, 450W Low	320W or 720W total with heater
Rating	220-240V, 50/60Hz, IPX2	230-240V AC, 50/60Hz, IP33	Universal voltage - 120 - 277V AC, 50/60Hz, IP24	220-240V AC, 50Hz, IPX3
Dimensions	320W x 635H x 250D mm	330W x 660H x 230D mm	311W x 368H x 100D mm	271W x 323H x 145D mm
Warranty	36 Month Limited Warranty	36 month limited warranty	60 month limited warranty	60 month limited warranty
Project Specification	<ul style="list-style-type: none">O'Connell's Pavillion, QueenstownGibbston Valley WinesStrata Lounge- Auckland AirportKiwirail - WalthamFisher Paykel HealthcareNZ Police HeadquartersAPL - Cambridge	<ul style="list-style-type: none">Westfield RicartonAuckland City MissionJustice Precinct - ChristchurchWestpac - The TerracesHoyts EntX - ChristchurchBidfoods - NationwideFoodstuffs Head Office - ChCh	<ul style="list-style-type: none">Skyline Gondala - QueenstownAuckland International AirportARA - ChristchurchDress Smart - AucklandAshburton Civic CentreYarrows StadiumExelooPermaloo	<ul style="list-style-type: none">Foundations Apartment- ParnellMitre10 - TakalaniRotorua Shopping CentreGoodwood School - CambridgeSudima - AucklandAirport Taxi Stand - AucklandBrookfield Primary SchoolCourt Theatre - Christchurch

SPL

SUPREME III



Supreme Airforce



Supreme Diamond-V



Supreme Master Air



Supreme BA101


Specific Benefits	Fast Dry Time Rapid air delivery 330km/hr dries hands quickly in just 12secs Energy Efficient Impressive efficiency high speed/ low energy 1100W motor Robust, Vandal Resistant Tough die cast aluminium (or brushed stainless steel) exterior with smooth rounded shape resists vandalism	Fast Dry Time High intensity single port nozzle delivers quick dry time of 12secs Energy Efficient High performing 820W digital brushless motor providing lower power consumption Quiet Small & quiet at only 72dBA @ 1m	Whisper Quiet At only 60dBA, the Master Air is quieter than most on the market Slimline Design Extending just 130mm from the wall, its slender form is a feature Easy to Use Install and enjoy with little maintenance	Robust Tough ABS Polycarbonate cover for longevity New Zealand Made Over 25 years of recognised service in NZ Easy to Use Unique drying chamber suitable for installation over reflective surface
Cover	Brushed stainless steel or die cast aluminium White / Black / Chrome with SteriTouch finish	Aviation aluminium cover, anodised finish Silver / Titanium / Rose Gold	Powder coated diecast aluminium White / Black / Natural Steel / Stainless Steel	ABS, Polycarbonate blend
Sound Level	75dBA @ 1.5m	72dBA @ 1m	60 dBA @ 1.5m	65 dBA @ 1.5m
Dry Time	12-15 seconds	9-11 seconds	25-35 seconds	25 seconds
Filtration	Nil	Nil	Nil	Nil
Element	Nil - ambient temperature. Air warms as it passes over motor	500W switchable on/off	1900W with overheat protection	2000W, heavy duty, protected by a resettable cut out and thermal fuse
Power	1100W	320W motor, 820W total	2000W	2000W
Rating	220-240V AC, 50Hz, IP24	220 -240V AC, 50/60Hz, IPX2	220- 240V AC, 50Hz, IP23	230 - 240V AC, 50Hz, IP22
Dimensions	266W x 271H x 165D mm	130W x 275H x 128D mm	265W x 290H x 130D mm	320W x 325H x 190D mm
Warranty	36 month limited warranty	36 month limited warranty	24 month limited warranty	24 month limited warranty
Project Specification	<ul style="list-style-type: none">126 Lambton Quay - WellingtonWhangarei Boys High SchoolChristchurch Central LibraryHornby High SchoolCambridge Town PoolsRotorua Lakes CouncilRototuna High SchoolBethlehem College	<ul style="list-style-type: none">Auckland City MissionLincoln Uni Science BlockMarlborough Art Centre & LibraryTe Ara Ātea - Rolleston LibraryYMCA - ChristchurchSylvia Park - AucklandTe Pou Theatre - Corban EstateQueenstown Airport	<ul style="list-style-type: none">Selwyn Health HubArrowtown Primary SchoolCashmere High SchoolWintec - TaurangaSnap Fitness- AucklandAUT AucklandMt Aspiring CollegeWainuiomata College	<ul style="list-style-type: none">Early Childhood & Primary SchoolsFactories & OfficesRestaurants

SPL

SUPREME III



Supreme Maxi Shield

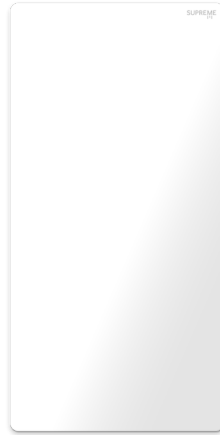

Supreme Wall Guard

Equipping
Washrooms

SPL

We offer an exclusive range of Sanela
Sensor and Piezo Soft Touch Tapware

Specific Benefits

New Builds or Retrofit

Provides an additional layer of protection

Prevents Redecoration

Saves time and expense - no need to renovate the entire space

Easy to Install

Comes with all fasteners required to fit the shield into place securely

Protect Walls

Keeps walls clean, dry, and mould-free

Hygienic

Maintaining the appearance and hygiene of commercial washrooms

Easy to Install

No drilling required – mounts to wall with 3M strips

Dimensions

400W x 500H x 13D mm

800H x 400W x 1.2D (stainless) or
1.4D (white) mm

Sound Level

Minus 10-12 dBA (through wall)

N/A

Warranty

12 Months on Manufacturing Defects

12 Months on Manufacturing Defects

