


SANELA[®]



URINAL FLUSH CONTROL

Sensor Operated
Hygienic & Controls Odour
Adjustable Flushing Time



Touchless Flush Control

System reacts to the user attendance in front of the urinal at a maximum distance of 0.7m, minimum stay time in active range is 7.5 secs.

Hygienic & Controls Odour

Keeps urinals fresh without the need for human intervention. Automatic janitor flush after 24 hours of non-use.

Courtesy Flush

Water only flows after the user leaves active range.

European Design & Manufacture

Long standing European manufacturer - high quality electronics combined with elegant aesthetics.



Maintain hygiene and be environmentally friendly with this leading-edge touchless flushing technology.


Non touch, passive infrared detects and responds to movement to operate flush only after the user has left the active range and will prevent the spread of germs and bacteria in the washroom.

Janitor Flush every 24 hours maintains hygiene when bathroom is out of use.



Stainless steel cover with electronics

Dimensions

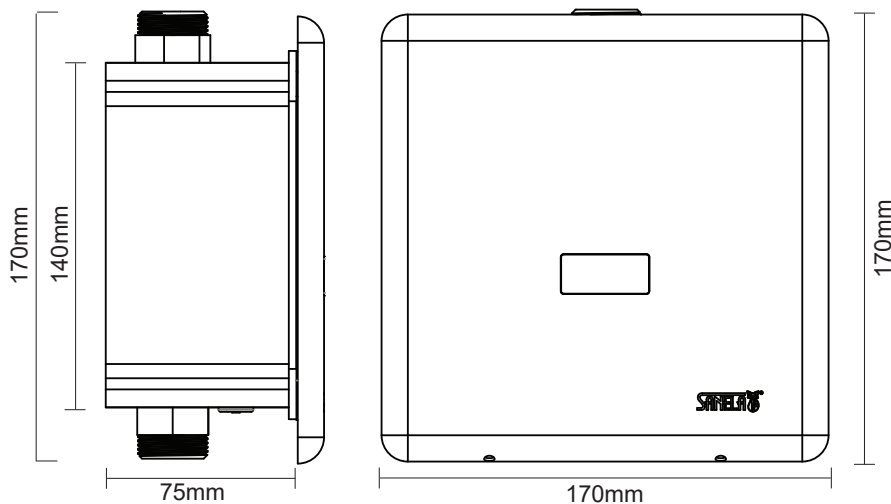

Mounting box with brass screw coupling, electromagnetic valve and ball valve

Specifications

Supply Specification

Stainless steel cover with electronics, plastic mounting box with brass screw coupling, electromagnetic valve and ball valve, integrated power supply

Power Supply

Mains 230V AC, 50Hz (input) 24V (output)

Location

Wall mounted above the urinal

Control

Infra-red sensor

Stainless Steel Cover Plate

Dimensions: 170 x 170 x 10mm

Mounting Box

Dimensions: 140 x 140 x 75mm

Operating Voltage

Mains 24V DC, 7W

Active Range

0.6- 0.75m - system reacts to user in front of urinal at max distance of 0.7m & min stay time of 7.5secs

Flush Cycles

Adjustable 0.5 secs - 15.5secs
Hygiene Flush: 24hrs after last use

Recommended Flow Pressure

0.1 - 0.6 Mpa (1-6 Bar)

Rate of Flow

18 l/min

Water Inlet

Male thread G 3/4 "

Water Outlet

Male thread G 3/4 "

Warranty

24 months

Product Code

SUI02AC (Mains)