

Sensor Operated  
Hygienic & Controls Odour  
Adjustable Flushing Time



**Touchless Flush Control**

System reacts to the user attendance within active range at a maximum distance of 0.7m, minimum stay time is 7.5 secs.

**Hygienic & Controls Odour**

Keeps toilets fresh without the need for human intervention. Automatic janitor flush after 24 hours of non-use.

**Courtesy Flush**

Water only flows after the user leaves active range.

**European Design & Manufacture**

Long standing European manufacturer - high quality electronics combined with elegant aesthetics.

**SPL**



Maintain hygiene and be environmentally friendly with this leading-edge touchless flushing technology.



Non touch, passive infrared detects and responds to movement to operate flush only after the user has left the active range and will prevent the spread of germs and bacteria in the washroom.

Janitor Flush every 24 hours maintains hygiene when bathroom is out of use.



Stainless steel cover with electronics

## Dimensions

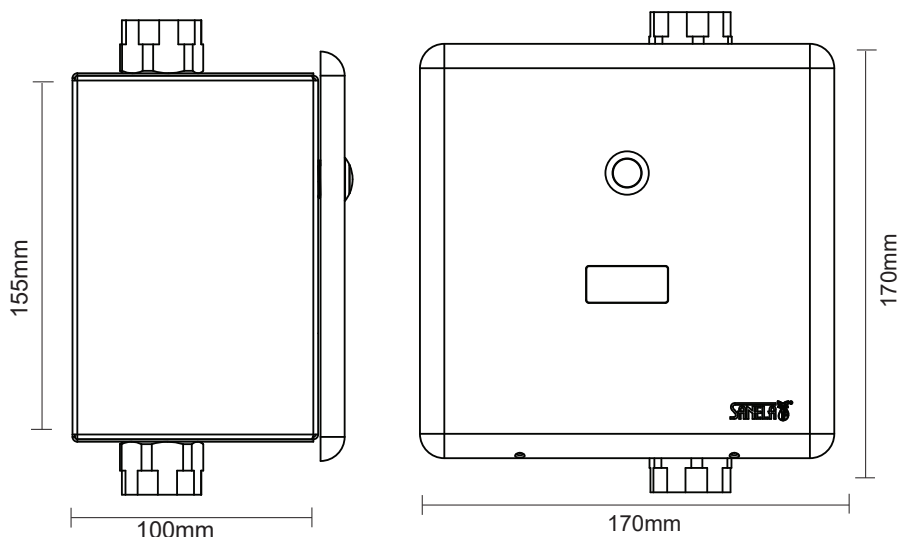

Mounting box with brass screw coupling, electromagnetic valve and ball valve

## Specifications

### Supply Specification

#### Power Supply

#### Location

#### Control

#### Parameters

#### Stainless Steel Cover

#### Mounting Box

#### Operating Voltage

#### Active Range

#### Flush Cycles

#### Recommended Flow Pressure

#### Rate of Flow

#### Water Inlet

#### Water Outlet

#### Warranty

#### Product Code

Stainless steel cover with electronics, stainless steel mounting box with brass screw coupling and electromagnetic valve, inlet fitting with a rubber seal

Mains - 230V AC, 50Hz (input) - 24V DC (output)

Wall mounted above the toilet

Infra-red sensor

Customisable via Bluetooth

Dimensions: 170 x 170 x 10mm

Dimensions: 145 x 155 x 100mm

24V DC, 7W

0.6- 0.75m - system reacts to user attendance in active range (0.7m) for min stay time of 7.5 - 7.75secs

Short Flush: (2s) min stay time 7.75 secs, max 45 secs

Long Flush: (5s) min stay time 45 secs (adjustable long flush 0.5 - 15.5 secs)

Manual Flush: (cleaning)

Hygiene Flush: 24hrs after last use

0.15 - 0.6 Mpa (1.5-6 Bar)

70 l/min @ 0.15 MPa (inf. data)

Ø min 32mm (PN 16) Male thread G 1 "

Male thread G 1 "

24 months

STI01AC