

SLOAN®

FLUSHOMETERS

Hydraulic Operation
Water Efficient
Reliable



Water Efficiency

WELS approved.

Reliability

Robust brass construction minimises vandalism.

Compatible

With a broad range of toilets and urinals. Mains or tank fed options.

Reputation

Sloan is a trusted brand with over 100 years in commercial plumbing.

Easy Maintenance


Modular parts (also compatible with Zurn).

SPL

SLOAN®

FLUSHOMETERS

Sloan hydraulic flushometers (valves) feature a push-button actuator that uses line water pressure to actuate the valve, and it can be located remotely from the valve itself, making these ideal for difficult installations. Includes a vacuum breaker to eliminate additional back-flow prevention.

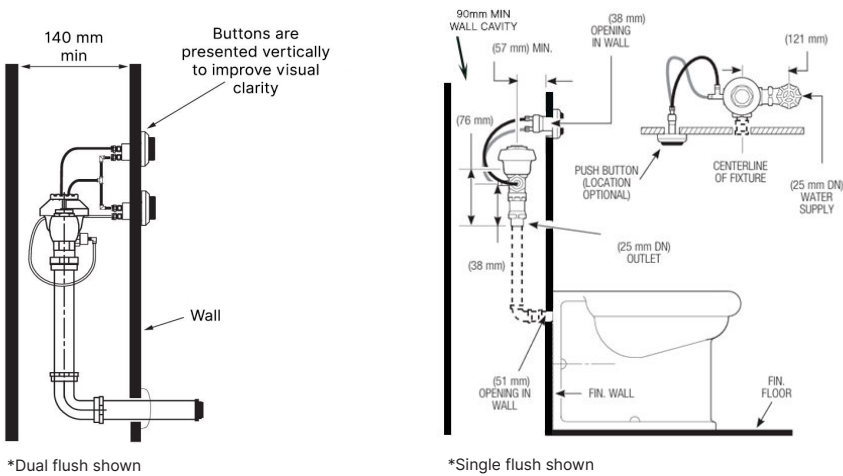

Space Required for Dual & Single Flush System	Dual Flush	Single Flush
Minimum wall cavity	140mm deep	90mm deep
Minimum width of assembly	270mm wide	270mm wide
Minimum height of assembly	200mm height	200mm height

Models

- SSFV950MEXB6** - Single flush W/C valve, no button - Mains 6L
- SSFV950M6** - Single flush W/C valve, chrome button - Mains 6L
- SSFV950T6** - Single flush W/C valve, chrome button - Tank 6L
- SDFV950M63** - Dual flush W/C valve, chrome button - Mains 6L/3L
- SDFV950T63** - Dual flush W/C valve, chrome button - Tank 6L/3L
- SDFV950M4522** - Dual flush W/C valve, chrome button - Mains 4.5L/2.2L
- SDFV950ME4522** - Dual flush W/C, exposed chrome plated - Mains 4.5L/2.2L
- SDFV950ME63** - Dual flush W/C, exposed chrome plated - Mains 6L/3L
- SSFVIR950M6** - Single flush, electronic, 150x150 infrared panel - Mains 6L
- SSFVESLUICE** - Single flush, exposed chrome plated for sluice sink - Mains
- SSFVISLUICE** - Single flush, internal, hydraulic button kit, chrome plated for sluice sink - Mains

Dual Flush Panels

300 x 300 mm



DFSP300



DFDP300

Single Flush Panels

300 x 300 mm



SFSP300



SFDP300

Mounting frames also available

Specifications

Supply Specification

Sloan flush valve, 25mm stopcock, flush pipe nut, vacuum breaker and hydraulic flush button

Location

Connection to back entry pans

Control

Hydraulically actuated push button

Water Pressure (Min)

Mains 150kPa Tank 40kPa*

Water Pressure (Max)

Mains 600kPa Tank 300kPa*

Minimum Flow Rate at Valve

60L/min*

Inlet Connection (Stop Valve)

25mm BSP (Mains) 40mm BSP (Tank)*

Outlet Connection (Flush Valve)

40mm BSP*

Flushing Volume

Single flush 6L (3L option) - 1 Star
Dual flush 6L/3L - 3 Star

Warranty

12 months

*Proper valve operation relies on accurate pipework design, which must be carried out by a suitably qualified professional

Concealed



Durability



Easy Use

