

SLOAN®

FLUSHOMETERS

Hydraulic Operation
Water Efficient
Reliable



Water Efficiency

WELS approved.

Reliability

Robust brass construction minimises vandalism.

Compatible

With a broad range of options for toilets and sluice sinks.

Reputation

Sloan is a trusted brand with over 100 years in commercial plumbing.

Easy Maintenance

Modular parts (also compatible with Zurn).


SPL

SLOAN®

FLUSHOMETERS

Sloan hydraulic Flushometers are commercial-grade, diaphragm-operated flush valves designed for concealed installation with 6L back-entry WC pans, for use on mains-pressure water supply systems.

The hydraulic push-button actuator uses line water pressure to actuate the valve and may be mounted remotely from the valve itself, making these ideal for difficult installations. Includes a vacuum breaker to eliminate additional back-flow prevention.

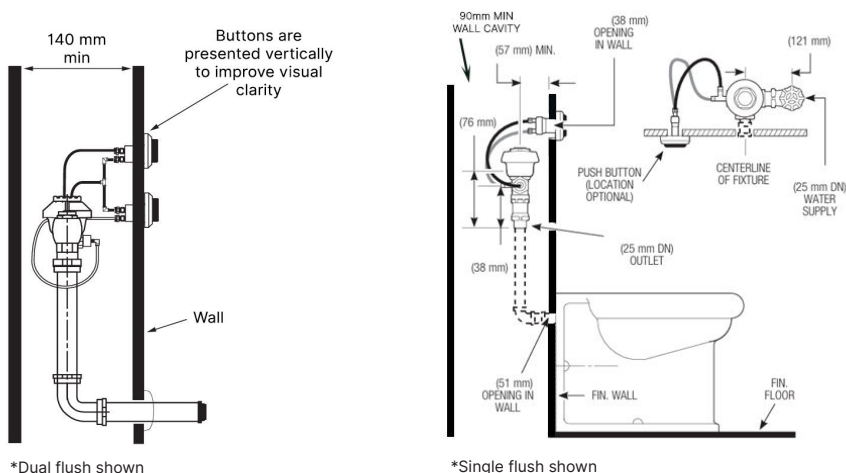


Space Required for Dual & Single Flush System	Dual Flush	Single Flush
Minimum Depth of Wall Cavity	140mm	90mm
Minimum Width of Assembly	270mm	270mm
Minimum Height of Assembly	200mm	200mm

Models

- SSFV950MEXB6** - Single flush W/C valve, no button - Mains 6L
- SSFV950M6** - Single flush W/C valve, chrome button - Mains 6L
- SDFV950M63** - Dual flush W/C valve, chrome button - Mains 6L/3L
- SDFV950M4522** - Dual flush W/C valve, chrome button - Mains 4.5L/2.2L
- SSFVIR950M6** - Single flush, electronic, 150x150 infrared panel - Mains 6L
- SSFVISLUICEM6** - Single flush, internal, hydraulic button kit, chrome plated for sluice sink - Mains 6L

Dual Flush Panels

300 x 300 mm

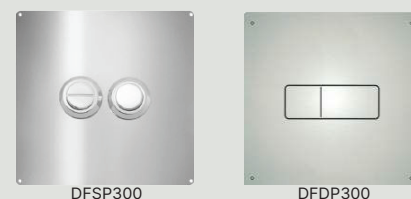

Single Flush Panels

300 x 300 mm



Mounting frames also available

Specifications

Supply Specification

Sloan flush valve, 25mm stopcock, flush pipe nut, vacuum breaker and hydraulic flush button and tubing

Location

Connection to 6L back entry pans

Control

Hydraulically actuated push button

Water Pressure (Min)

Mains 150kPa*

Water Pressure (Max)

Mains 600kPa*

Minimum Flow Rate at Valve

60L/min*

Inlet Connection (Stop Valve)

25mm BSP*

Outlet Connection (Flush Valve)

40mm BSP*

Flushing Volume

Single flush 6L (3L option) - 1 Star
Dual flush 6L/3L - 3 Star

Warranty

12 months

*Proper valve operation relies on accurate pipework design, which must be carried out by a suitably qualified professional

Concealed



Durability



Easy Use

